

swf

STEEL WINDOW FITTINGS



Openers Range



For all fittings to hold windows into place, Steel Window Fittings' openers are expertly crafted to sit securely and operate smoothly.

<b>Spring Catches and Plates</b>	● ————— ●	<b>Pages 4 - 7</b>
<b>Folding Openers</b>	● ————— ●	<b>Pages 8 - 11</b>
<b>Accessories</b>	● ————— ●	<b>Pages 12 - 17</b>

---

swf

STEEL WINDOW FITTINGS





# Spring Catches and Catch Plates

SWF spring catches sit against the frame of bottom hung windows in order to provide extra security.

Use two spring catches with link tubes for wider windows.








## B36 Spring Catch with Ring Pull

## PRODUCT FEATURES & TECHNICAL INFORMATION

- For use with bottom hung, open inward windows
- Added feature with a ring pull which offers versatility for single opener to be used at height with suitable rod
- Use with suitable fixing accessories S739, SS41 and SS41FF
- Use 2 spring catches with B99DT link tube which is available in 3 sizes for large open inward windows
- B99DRING ring pull can be fitted to link tube offering versatility for opener to be used at height with a suitable rod
- Suitable for M6 countersunk fixing screws
- Available in several finishes or matching RAL finish on request
- Complimentary window handles, peg stays, door handles and escutcheons available for suited look

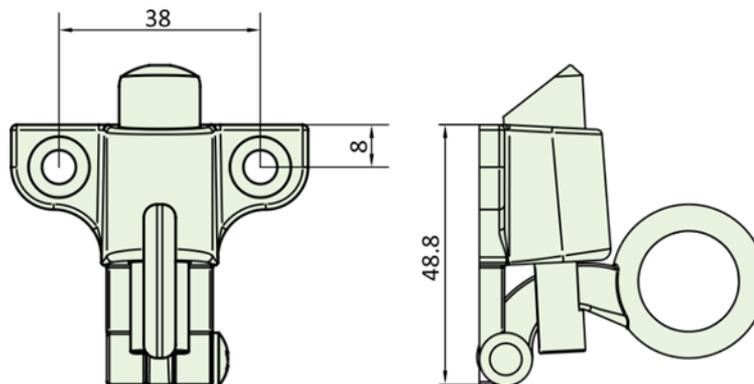

Dimensions





### B36 Spring Catch Accessories

## PRODUCT FEATURES & TECHNICAL INFORMATION


- For use with B36 Spring catch
- All accessories suitable for M5 countersunk fixing screws
- S739 offers concealed fixing holes and requires a suitable finish to be applied, *this is normally fixed to the window during preparation stages*
- SS41 offers face fixing and is used where window and frame are not flush
- SS41FF offers flush face fixing and is used where window and frame are flush
- SS41 & SS41FF are available in several finishes or matching RAL finishes on request




SS41FF Flush Face Fix

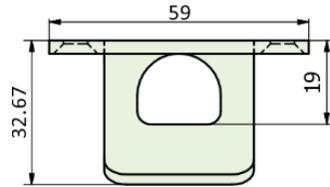

SS41 Flush Face Fix

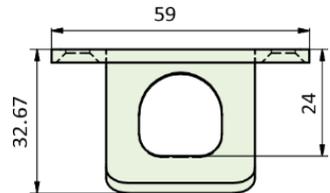

S739 Catch Plate

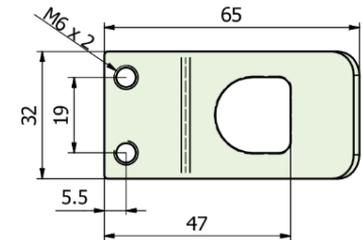

Dimensions



# Folding Openers

For top hung, open out windows, the folding openers provide restriction to 100mm. Link tubes are able to be fitted with two folding openers for wider windows

Match folding openers to handles, stays and other fittings with a range of finishes.






## B99 Folding Opener with Ring Pull

## PRODUCT FEATURES & TECHNICAL INFORMATION

- For use with top hung, open outward windows
- Restricts window opening to approximately 100mm (4")
- Can be used as a single folding opener (B99S) or a double folding opener (B99D) for larger windows when used with B99DT link tube available in 3 sizes
- B99DRING ring pull can be fitted to link tube offering versatility for opener to be used at height with a suitable rod
- Suitable for M6 and M5 countersunk fixing screws (requires both)
- Available in several finishes or matching RAL finish on request
- Complimentary window handles, peg stays, door handles and escutcheons available for suited look



B99 Folding Opener

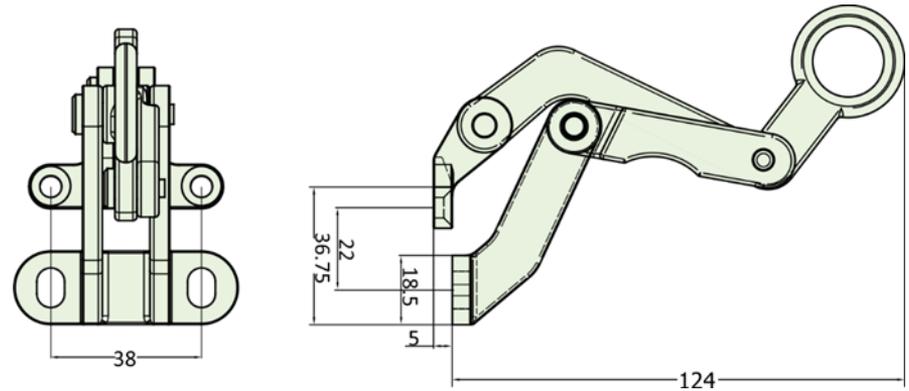

Dimensions



STEEL WINDOW FITTINGS



The logo consists of the lowercase letters 'swf' in a bold, sans-serif font, enclosed within a light green square border.

STEEL WINDOW FITTINGS



# Link Tubes & D Ring

Link your B36 and B99 openers with optional link tubes.








### B99DT Link Tube



## PRODUCT FEATURES & TECHNICAL INFORMATION

- A versatile link tube available in 3 sizes
- For use with double folding openers (B99D) on large top hung, outward opening windows
- For use when fitting 2 single spring catches (B36) on large bottom hung, inward opening windows
- B99DRING ring pull can be fitted to the link tube offering versatility for openers used at height and operated with a suitable rod
- Available in several finishes or matching RAL finish on request
- Complimentary window handles, peg stays, door handles and escutcheons available for suited look

B528M & Dimensions

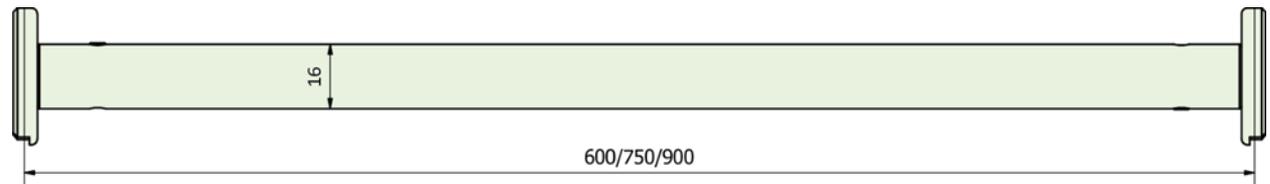

B528R & Dimensions



## PRODUCT FEATURES & TECHNICAL INFORMATION

- Can be used with B99DT link tube in conjunction with either the B99D double folding opener or the B36 spring catch opener



The logo consists of the lowercase letters 'swf' in a bold, sans-serif font, enclosed within a thin, light-colored square border that is slightly offset from the corners.

swf


STEEL WINDOW FITTINGS

The background of the slide features several stainless steel window fittings scattered across a white surface. These include long rectangular plates with two circular holes, a curved metal piece with a central notch, a small cylindrical component with a hexagonal base, and various other brackets and plates with circular cutouts.

# Carriage Locks

Compatible with both open in and open out windows, the carriage lock is an unobtrusive component that locks or restricts access to windows.

B805KEY supplied separately. The carriage lock can also be operated with a fireman axe style key.



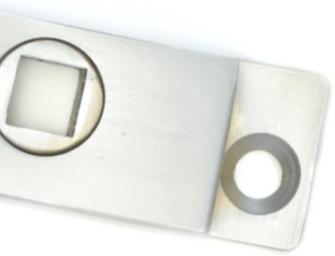




## B805 Carriage Lock and Accessories

## PRODUCT FEATURES & TECHNICAL INFORMATION

- A discrete lock operated by a B805KEY or any 8mm spindle. Perfect for controlled additional security and/or restricted window access where required
- Suitable for both open inward or open outward windows, supplied with 2 keeps to suit different window system configurations
- Separate B805PSC Pull Kit available if required along with 2 spacers to suit different window configurations
- Separate B805KEY available, can also be operated by Fireman Axe type key
- Suitable for M5 countersunk fixing screws
- Available in several finishes or matching RAL finish on request
- Complimentary window handles, peg stays, door handles and escutcheons available for suited look

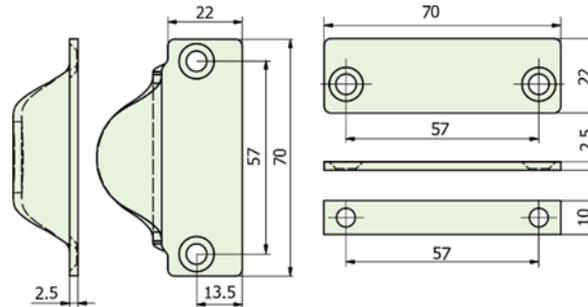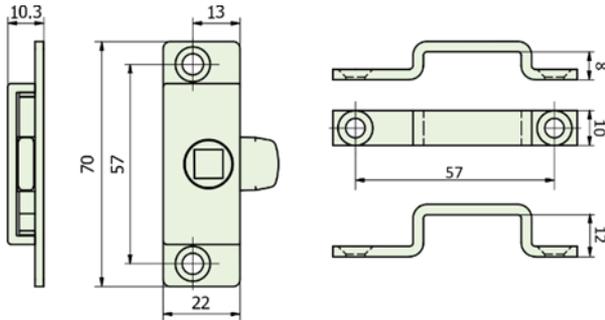

Dimensions



swf

STEEL WINDOW FITTINGS



# Steel Window Fittings

Steel Window Fittings LTD,  
Unit 5, Bridge Business Park,  
Horsehay, Shropshire, TF4 3EE

[Info@steelwindowfittings.com](mailto:Info@steelwindowfittings.com)

+44 (0) 1952 794054

+44 (0) 1952 794154

[steelwindowfittings.com](http://steelwindowfittings.com)

Co. Reg No: 7614370 England

VAT Reg No: GB 114 4647 30



*This Catalogue supersedes all previous issues and can be subject to change without any prior notification. With our continuous product development we reserve the right to make modifications to our products which may include but not limited to specification, dimension and configuration changes without prior notice. This Catalogue is designed to provide you with*